


## 21" Drop Ceiling Tubular Skylight Specifications

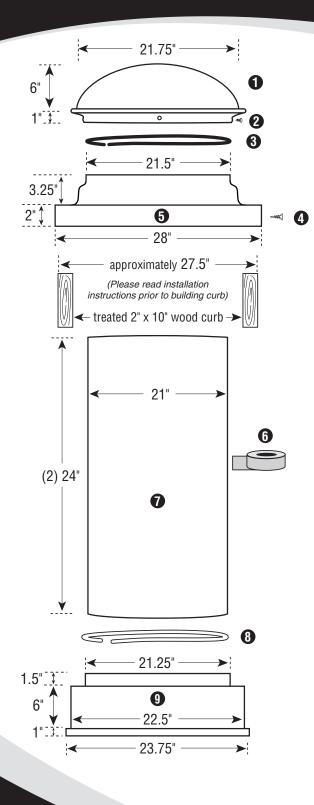

## **21" CURB-MOUNTED FLASHING**

- 1. Clear UV Protected, 100% High Impact Modified Acrylic Dome
- **2.** (4) Phillips Head Stainless Steel <sup>1</sup>/<sub>4</sub>" Sheet Metal Screws
- 3. Black Nylon Horse Hair Gasket (Self-Adhesive Backed)
- 4. (4) Flat Head Screws (for light pipe installation/support)
- 5. Commercial Pure Grade, 1100 Series Aluminum Flashing
- 6. Heavy Duty Foil Tape
- 7. Light Pipe, (2) 24" Sections per Kit
- 8. White Nylon Horse Hair Gasket (Self-adhesive Backed)
- 9. Powder Coated White Transition Box

## **COVERAGE AREA**


up to 700 sq. ft.

WATTAGE OUTPUT EQUIVALENT up to 1,450 watts MAXIMUM TUBE LIGHT LENGTH



20 feet

## **21" FLAT ROOF FLASHING**



www.nltubular.com