# NATURAL LIGHT TUBULAR SKYLIGHTS

The Difference between Night and Day!



Dark warehouses and commercial office buildings are no match for Natural Light's tubular skylights. Installed on virtually any type of roof surface in under two hours, our 21" commercial units are capable of delivering up to 1400 watts of light without the heat gain or loss of standard framed-in skylights.








### 25-YEAR PRODUCT WARRANTY


ICC-ES LISTED FLORIDA BUILDING CODE APPROVED HURRICANE TESTED & APPROVED





# 21" Tubular Skylight Technical Specifications

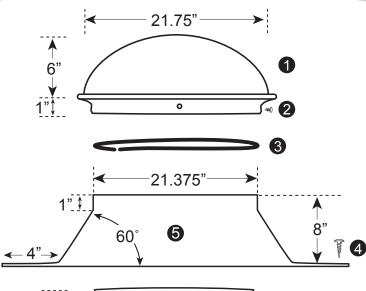

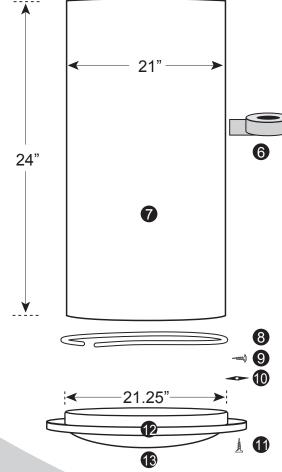

#### 21" FLAT ROOF FLASHING

- 1. Clear UV Protected, 100% High Impact Acrylic Dome
- 2. (4) Philips Head Stainless Steel 1/4" Sheet Metal Screws
- 3. Black Nylon Horsehair Gasket (Self-Adhesive Backed)
- 4. (6) Phillips Head Stainless Steel 1 1/2" Screws
- 5. Commercial Pure Grade, 1100 Series Aluminum Flashing
- 6. Heavy Duty Foil Tape
- 7. Light Pipe, (2) 24" Sections per Kit
- 8. White Nylon Horsehair Gasket (Self-adhesive Backed)
- 9. (6) Tek Screws
- 10. (3) Black Speed Nuts
- 11. (3) 1 1/2" Phillips Screws
- 12. White Powder Coated Aluminum Trim Ring/Ceiling Ring
- 13. Acrylic Soft White or Prismatic Diffuser

COVERAGE AREA - up to 700 sq. ft.
WATTAGE OUTPUT EQUIVALENT - up to 1450 watts
MAXIMUM TUBE LIGHT LENGTH - 20 feet



## **WAREHOUSE 21" TRIM RING**

for suspended installations in open ceilings



